



# NOCO BOOST<sup>®</sup> X<sup>™</sup>



**NOCO<sup>®</sup>**

PROPRIETARY AND CONFIDENTIAL. COPYRIGHT © 2021 THE NOCO COMPANY

THIS DOCUMENT CONTAINS PROPRIETARY, CONFIDENTIAL, COPYRIGHTED, AND TRADE SECRET INFORMATION OF THE NOCO COMPANY AND ITS AFFILIATED COMPANIES ("NOCO"). ALL MATERIAL, INFORMATION, AND CONTENT ARE THE PROPERTY OF NOCO, AND NOCO RETAINS ALL RIGHT, TITLE, AND INTEREST THEREIN. THIS DOCUMENT MAY NOT BE COPIED, DISSEMINATED, DISCLOSED, PUBLISHED, DIVULGED, OR REPRODUCED, IN WHOLE OR IN PART, WITHOUT THE PRIOR WRITTEN CONSENT OF NOCO. TITLE IN AND TO THIS DOCUMENT (NO MATTER IF IN PRINTED, ELECTRONIC, OR ANY OTHER FORM) AND ALL INFORMATION CONTAINED HEREIN REMAINS AT ALL TIMES IN NOCO. NO INTELLECTUAL PROPERTY RIGHTS ARE TRANSFERRED TO YOU BY ACCESS TO THIS DOCUMENT OR OTHERWISE.

V05.21.2021A 1



# EXTREME POWER.





# START DEAD BATTERIES.™

Introducing a new kind of jump starting experience — an all new design offers extreme jump starting power for fast and powerful engine starts.



**#1 SELLING**  
BRAND

**LITHIUM**  
POWERED

**12V**  
VOLT

**ULTRASAFE® 2.0**  
DESIGN

**NOCO®**

PROPRIETARY AND CONFIDENTIAL. COPYRIGHT © 2021 THE NOCO COMPANY

THIS DOCUMENT CONTAINS PROPRIETARY, CONFIDENTIAL, COPYRIGHTED, AND TRADE SECRET INFORMATION OF THE NOCO COMPANY AND ITS AFFILIATED COMPANIES ("NOCO"). ALL MATERIAL, INFORMATION, AND CONTENT ARE THE PROPERTY OF NOCO, AND NOCO RETAINS ALL RIGHT, TITLE, AND INTEREST THEREIN. THIS DOCUMENT MAY NOT BE COPIED, DISSEMINATED, DISCLOSED, PUBLISHED, DIVULGED, OR REPRODUCED, IN WHOLE OR IN PART, WITHOUT THE PRIOR WRITTEN CONSENT OF NOCO. TITLE IN AND TO THIS DOCUMENT (NO MATTER IF IN PRINTED, ELECTRONIC, OR ANY OTHER FORM) AND ALL INFORMATION CONTAINED HEREIN REMAINS AT ALL TIMES IN NOCO. NO INTELLECTUAL PROPERTY RIGHTS ARE TRANSFERRED TO YOU BY ACCESS TO THIS DOCUMENT OR OTHERWISE.

V05.21.2021A 3



# A WHOLE NEW SERIES.

This isn't an upgrade. It's a whole new series - the Extreme Series.





# MORE STARTING POWER. PX LITHIUM TECHNOLOGY.

Boost X's PX Lithium Technology delivers incredible power, ultra-fast charging, and unmatched versatility.



PROPRIETARY AND CONFIDENTIAL. COPYRIGHT © 2021 THE NOCO COMPANY

THIS DOCUMENT CONTAINS PROPRIETARY, CONFIDENTIAL, COPYRIGHTED, AND TRADE SECRET INFORMATION OF THE NOCO COMPANY AND ITS AFFILIATED COMPANIES ("NOCO"). ALL MATERIAL, INFORMATION, AND CONTENT ARE THE PROPERTY OF NOCO, AND NOCO RETAINS ALL RIGHT, TITLE, AND INTEREST THEREIN. THIS DOCUMENT MAY NOT BE COPIED, DISSEMINATED, DISCLOSED, PUBLISHED, DIVULGED, OR REPRODUCED, IN WHOLE OR IN PART, WITHOUT THE PRIOR WRITTEN CONSENT OF NOCO. TITLE IN AND TO THIS DOCUMENT (NO MATTER IF IN PRINTED, ELECTRONIC, OR ANY OTHER FORM) AND ALL INFORMATION CONTAINED HEREIN REMAINS AT ALL TIMES IN NOCO. NO INTELLECTUAL PROPERTY RIGHTS ARE TRANSFERRED TO YOU BY ACCESS TO THIS DOCUMENT OR OTHERWISE.

V05.21.2021A 5



# FAST CHARGE.

Boost X is equipped with USB-C technology that, combined with power delivery, gives you lightning-fast recharges. Completely recharges in 48-minutes, or go from 0% to jump starting in just 5-minutes of charge. Recharge from any USB-C power source (e.g. AC charger, laptop, car charger).

## RECHARGE TIME.

|                                      | Recharge time | Charger Rating |
|--------------------------------------|---------------|----------------|
| <b>GBX45</b><br>BOOST <sup>XX</sup>  | <b>0.8h</b>   | <b>60W</b>     |
| <b>GBX55</b><br>BOOST <sup>XX</sup>  | <b>1.2h</b>   | <b>60W</b>     |
| <b>GBX75</b><br>BOOST <sup>XX</sup>  | <b>1.7h</b>   | <b>60W</b>     |
| <b>GBX155</b><br>BOOST <sup>XX</sup> | <b>2.7h</b>   | <b>60W</b>     |





# **FAST CHARGE.** **12V TO USB-C WITH GBC011.**

Plug in the **GBC011** 12V to USB-C Cable (included with the GBX75 and GBX155) to charge the GBX unit from the vehicle's 12-volt auxiliary port. The **GBC011** can be purchased separately.

**COMING SOON**

**USB-C FAST CHARGE IN**

**PLUGS INTO 12V PORT**

**GBC011**  
65W 12V CAR CHARGER




# AUTO POWER CONSERVATION.

## 60-SECOND TIMER.

Start vehicle within 60 seconds.

## POWER ON/OFF TO RESET.

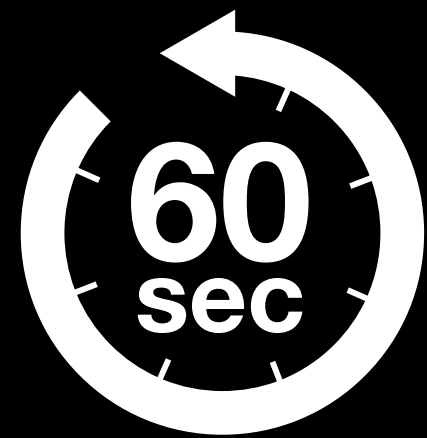

After the 60-second timeout is complete, the unit must be powered off, then back on, to initiate a new jump-start sequence.





# CHARGE DEVICES. UP TO 60W FAST CHARGING.

Charge devices with both USB-A and USB-C ports.  
Recharge Boost via fast charge USB-C IN.



USB-C IN + OUT  
**USB-C**  
Recharge Boost.  
Charge devices.



2.1A USB-A OUT  
**USB-A**  
Charge devices.




PROPRIETARY AND CONFIDENTIAL. COPYRIGHT © 2021 THE NOCO COMPANY

THIS DOCUMENT CONTAINS PROPRIETARY, CONFIDENTIAL, COPYRIGHTED, AND TRADE SECRET INFORMATION OF THE NOCO COMPANY AND ITS AFFILIATED COMPANIES ("NOCO"). ALL MATERIAL, INFORMATION, AND CONTENT ARE THE PROPERTY OF NOCO, AND NOCO RETAINS ALL RIGHT, TITLE, AND INTEREST THEREIN. THIS DOCUMENT MAY NOT BE COPIED, DISSEMINATED, DISCLOSED, PUBLISHED, DIVULGED, OR REPRODUCED, IN WHOLE OR IN PART, WITHOUT THE PRIOR WRITTEN CONSENT OF NOCO. TITLE IN AND TO THIS DOCUMENT (NO MATTER IF IN PRINTED, ELECTRONIC, OR ANY OTHER FORM) AND ALL INFORMATION CONTAINED HEREIN REMAINS AT ALL TIMES IN NOCO. NO INTELLECTUAL PROPERTY RIGHTS ARE TRANSFERRED TO YOU BY ACCESS TO THIS DOCUMENT OR OTHERWISE.



# ULTRA-BRIGHT. 100-LUMENS.

A rechargeable lithium-powered **LED flashlight** provides a tactical-grade experience with long-range, ultra-bright illumination, controllable luminosity, and emergency modes.

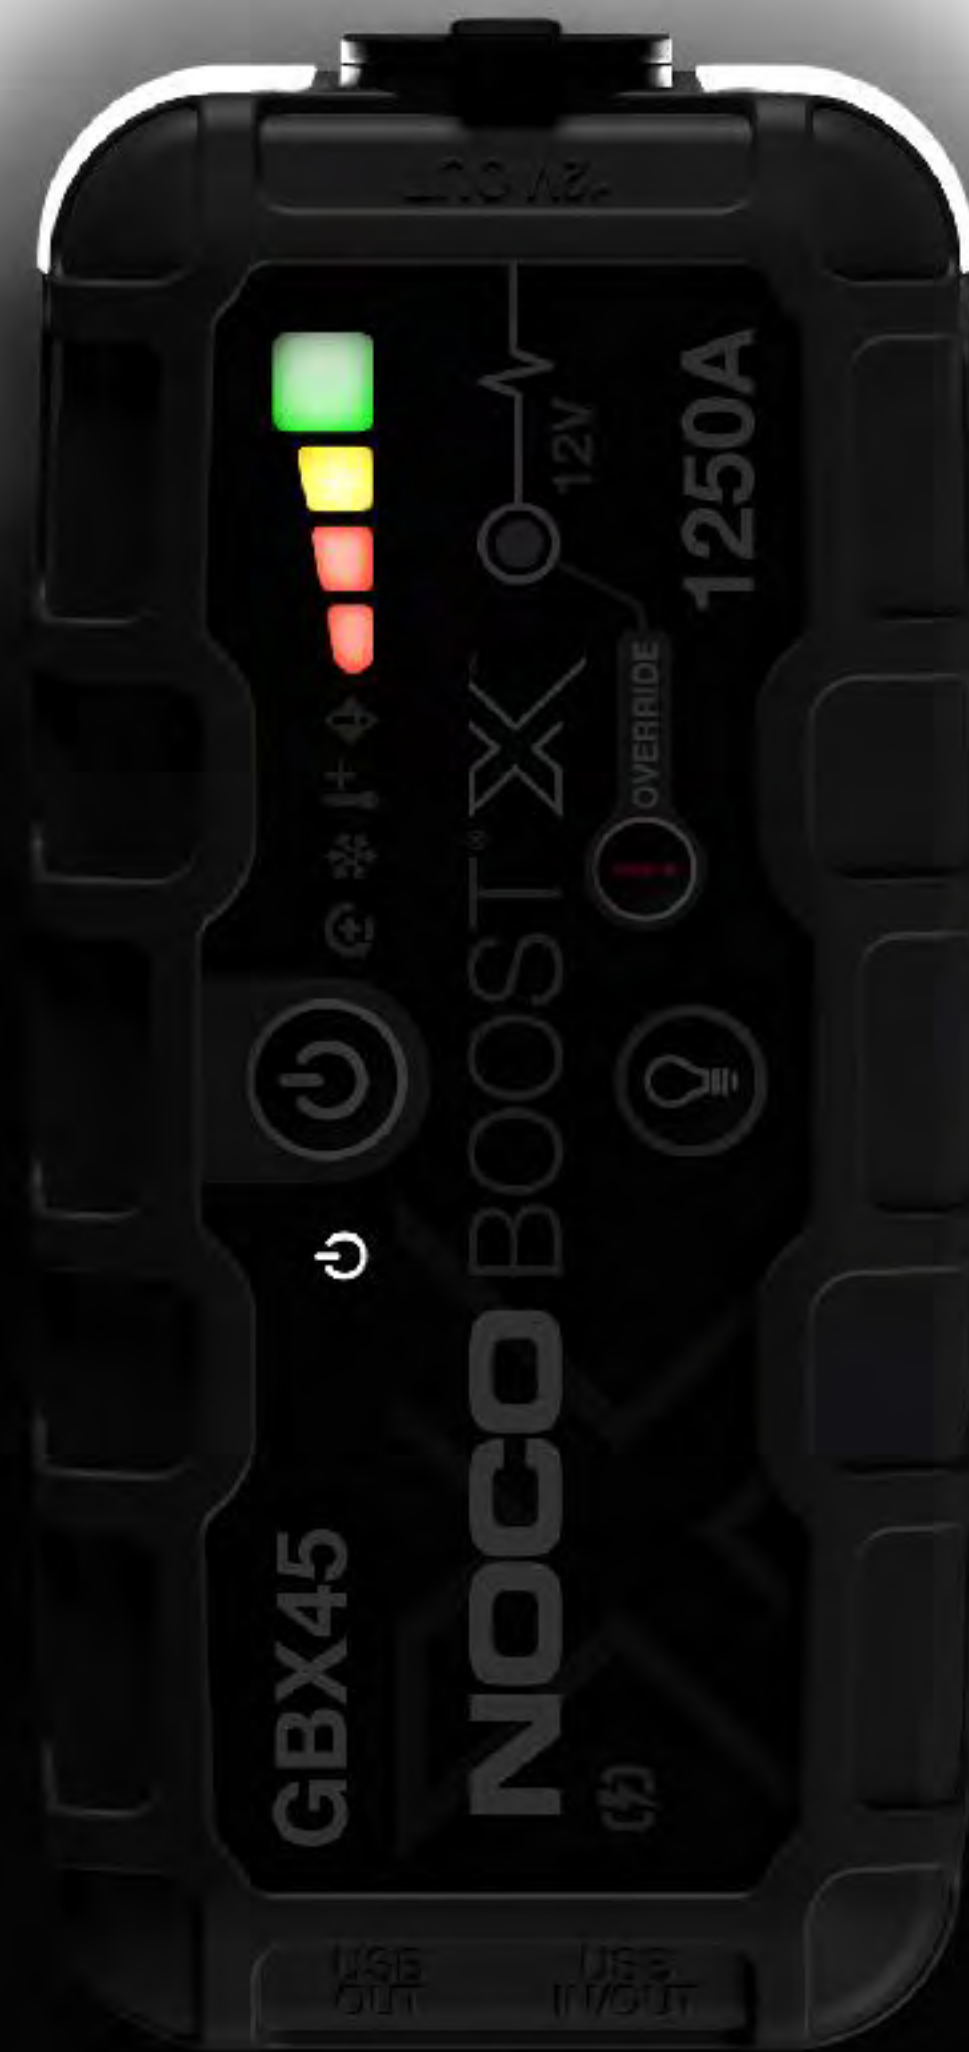

100%  
50%  
10%  
SOS  
BLINK  
STROBE



# PRACTICAL INDICATORS. INTUITIVE USER INTERFACE.

GBX's clear user interface improves usability. The **Fast Charge LED** indicates the USB-C port active. **Cold** and **Hot Smart LEDs** indicate when the unit is reaching the upper and lower limits of its temperature range.





# DESIGNED TOUGH.







**PROTECTS AGAINST WATER, DIRT, DUST, AND MORE.**



# UP TO 40% WIDER. CLAMPING RANGE.

Designed to fit battery terminals of any shape and size. Engineered for improved clamping range, clamping force, and higher conductivity.



**GBX45** 8 AWG  
HD Precision Clamps



**GBX55** 8 AWG  
HD Precision Clamps



**GBX75** 6 AWG  
HD Precision Clamps



**GBX155** 4 AWG  
HD Precision Clamps



**GLOBAL  
SAFETY.**



**UL**



**IEC**



**REACH**



**ROHS**



**FCC**



**CE**



**RCM**



# NOCO BOOST<sup>®</sup> X<sup>™</sup>

## ULTRASAFE<sup>®</sup> LITHIUM JUMP STARTERS.



**GBX45**  
BOOST<sup>®</sup> X<sup>™</sup>  
0180018



**GBX55**  
BOOST<sup>®</sup> X<sup>™</sup>  
0180019



**GBX75**  
BOOST<sup>®</sup> X<sup>™</sup>  
0180020



**GBX155**  
BOOST<sup>®</sup> X<sup>™</sup>  
0180021



# GBX45 BOOST<sup>®</sup>X<sup>™</sup>

## ULTRASAFE<sup>®</sup> JUMP STARTER

0180018

JUMPSTARTERS

ACCESSORIES

OVERVIEW

TECH SPECS

COMPARE



12V 1250A

6.5L PETROL  
4.0L DIESEL

FAST CHARGE  
USB-C IN/OUT

LED FLASHLIGHT  
100-LUMEN  
SEVEN LIGHT MODES



#### What's In The Box

- GBX45 Lithium Jump Starter
- HD Precision Clamps
- 24in USB-A to USB-C Cable
- Microfiber Storage Bag
- User Guide & Warranty Information

#### Retail Packaging

Dimensions: 3.62" x 4.57" x 8.27"  
Weight: 2.75 lbs  
UPC: 0-46221-15002-5

#### Inner Carton:

Dimensions: 4.01" x 8.78" x 5.12"  
Weight: 2.89 lbs

#### Master Carton:

Dimensions: 9.25" x 12.6" x 11.22"  
Weight: 18.30 lbs  
Quantity: 6  
UCC: 10046221150022

#### Units Per Pallet:

270 Units

**NOCO**<sup>®</sup>

PROPRIETARY AND CONFIDENTIAL. COPYRIGHT © 2021 THE NOCO COMPANY

THIS DOCUMENT CONTAINS PROPRIETARY, CONFIDENTIAL, COPYRIGHTED, AND TRADE SECRET INFORMATION OF THE NOCO COMPANY AND ITS AFFILIATED COMPANIES ("NOCO"). ALL MATERIAL, INFORMATION, AND CONTENT ARE THE PROPERTY OF NOCO, AND NOCO RETAINS ALL RIGHT, TITLE, AND INTEREST THEREIN. THIS DOCUMENT MAY NOT BE COPIED, DISSEMINATED, DISCLOSED, PUBLISHED, DIVULGED, OR REPRODUCED, IN WHOLE OR IN PART, WITHOUT THE PRIOR WRITTEN CONSENT OF NOCO. TITLE IN AND TO THIS DOCUMENT (NO MATTER IF IN PRINTED, ELECTRONIC, OR ANY OTHER FORM) AND ALL INFORMATION CONTAINED HEREIN REMAINS AT ALL TIMES IN NOCO. NO INTELLECTUAL PROPERTY RIGHTS ARE TRANSFERRED TO YOU BY ACCESS TO THIS DOCUMENT OR OTHERWISE.

V05.21.2021A 17



# GBX45

## BOOST<sup>®</sup> X<sup>™</sup>

### ULTRASAFE<sup>®</sup> JUMP STARTER

# TECH SPECS

0180018

JUMPSTARTERS

ACCESSORIES

OVERVIEW

TECH SPECS

COMPARE

#### Operating Requirements

**Operating Temperature:** -4° to 122° F (-20° to +50° C)

**Charging Temperature:** 32° to 104° F (0° to +40° C)

**Storage Temperature:** -4° to 122° F (-20° to +50° C)

**Relative Humidity:** 0 to 95% Non-Condensing

**Cooling:** Natural Convection

#### Jump Starting

**Petrol Engine Size:** 6.5L

**Diesel Engine Size:** 4.0L

**Peak Current:** 1250 Amps

**Battery Types:** 12V Lead-Acid Only  
(Wet, Gel, MF, EFB, AGM)

#### Flashlight

**Lumens (LED's):** 100L

**Number of Modes:** 7X

(100%, 50%, 10%, SOS, Blink, Strobe, Off)

#### Safety

**Over-Current:** Yes

**Open-Circuit:** Yes

**Over-heating:** Yes

**Over-charge:** Yes

**Spark-Proof:** Yes

**Reverse Polarity:** Yes

#### Protection

**IP Rating:** IP65 (w/ Ports Closed)

#### Size and Weight

**Length:** 6.8 Inches (172.72 mm)

**Width:** 3.3 Inches (83.82 mm)

**Height:** 2.1 Inches (53.34 mm)

**Weight:** 1.3 Pounds (1.08 kg)

#### Charging

**USB-C (In):** 5V 1.5A/9V 3A/12V 3A/15V 3A/20V 3A

**USB-C (Out):** 5V 3A/9V 3A/12V 3A/15V 3A/20V 3A

**USB (Output):** 5VDC 2.1A Max / 10W Max

**Recharge Time:** 0.8h @ 60W

#### Internal Battery

**Capacity:** 2150mAh

**Watt Hours:** 31Wh

**Chemistry:** Lithium Nickel Manganese Cobalt

**Charge Cycles:** Over 1000X

**Charge Length:** Holds 70% Charge Over A Year

#### Clamps


**Type:** HD Precision Clamps

**Span:** 2.09 Inches (53.08 mm)

**Wire Size:** 8 AWG

#### Limited Warranty

1-Year Limited Warranty

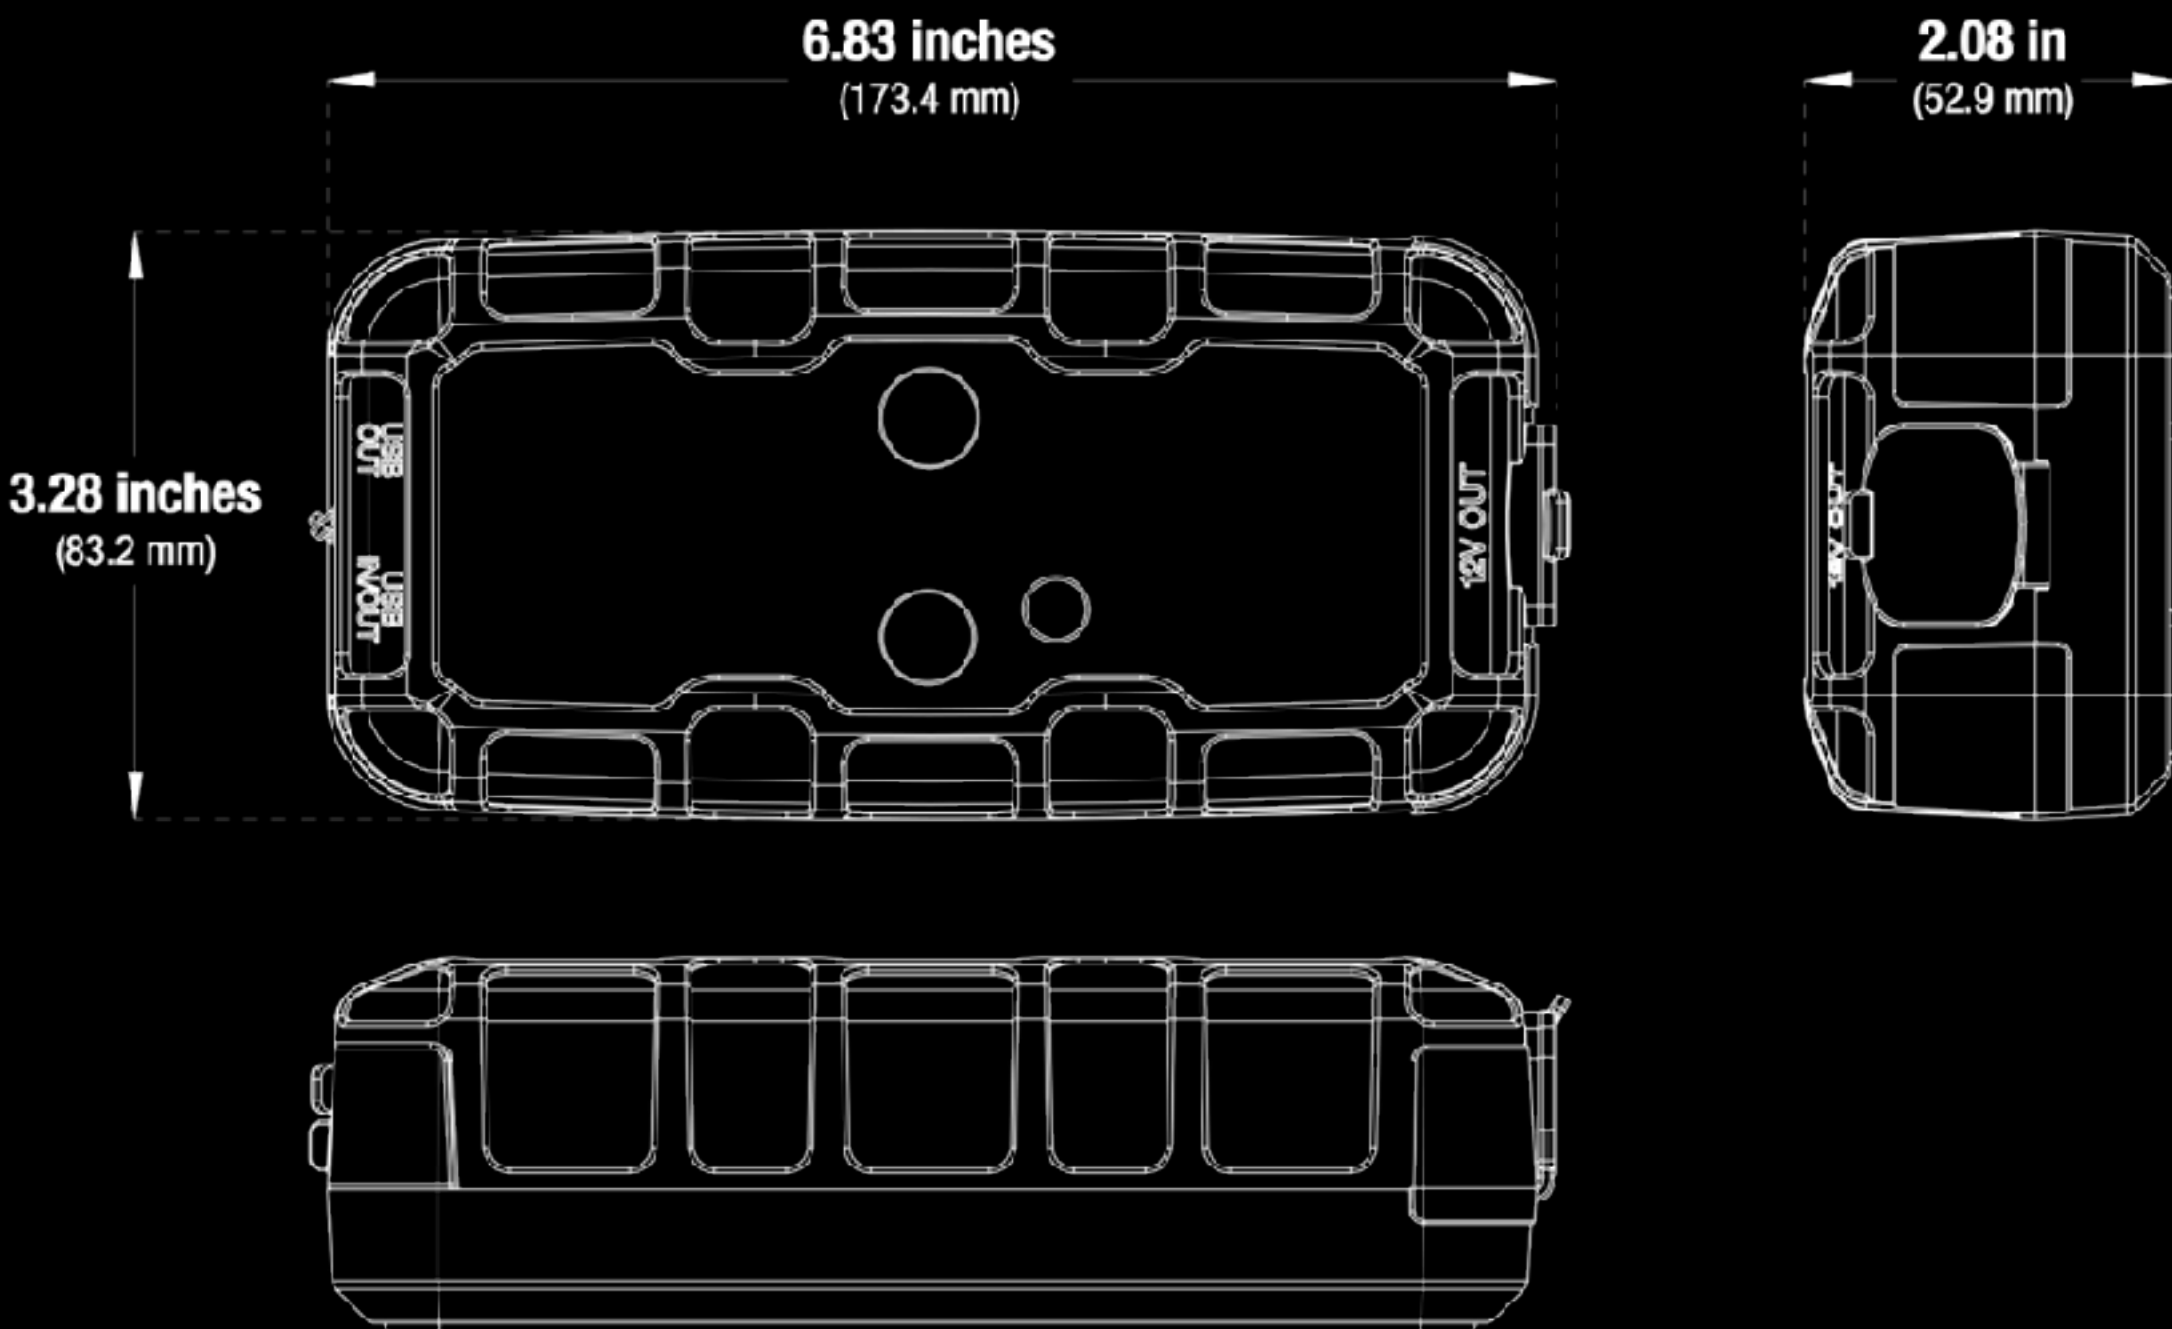



# GBX55 BOOST<sup>®</sup>X<sup>™</sup> ULTRASAFE<sup>®</sup> JUMP STARTER

0180019



12V 1750A

7.5L PETROL  
5.0L DIESEL

FAST CHARGE  
USB-C IN/OUT

LED FLASHLIGHT  
200-LUMEN 4 LEDs  
SEVEN LIGHT MODES

JUMPSTARTERS

ACCESSORIES

OVERVIEW

TECH SPECS

COMPARE



#### What's In The Box

- GBX55 Lithium Jump Starter w/ integrated HD Precision Clamps
- 24in USB-A to USB-C Cable
- Microfiber Storage Bag
- User Guide & Warranty Information

#### Retail Packaging

Dimensions: 3.9" x 4.7" x 9.1"  
Weight: 3.35 lbs  
UPC: 0-46221-18017-6

#### Inner Carton:

Dimensions: 4.13" x 9.37" x 5.27"  
Weight: 3.51 lbs

#### Master Carton:

Dimensions: 10.25" x 13.50" x 11.34"  
Weight: 22.11 lbs  
Quantity: 6  
UCC: 10046221180173

#### Units Per Pallet:

234 Units

**NOCO**<sup>®</sup>

PROPRIETARY AND CONFIDENTIAL. COPYRIGHT © 2021 THE NOCO COMPANY

THIS DOCUMENT CONTAINS PROPRIETARY, CONFIDENTIAL, COPYRIGHTED, AND TRADE SECRET INFORMATION OF THE NOCO COMPANY AND ITS AFFILIATED COMPANIES ("NOCO"). ALL MATERIAL, INFORMATION, AND CONTENT ARE THE PROPERTY OF NOCO, AND NOCO RETAINS ALL RIGHT, TITLE, AND INTEREST THEREIN. THIS DOCUMENT MAY NOT BE COPIED, DISSEMINATED, DISCLOSED, PUBLISHED, DIVULGED, OR REPRODUCED, IN WHOLE OR IN PART, WITHOUT THE PRIOR WRITTEN CONSENT OF NOCO. TITLE IN AND TO THIS DOCUMENT (NO MATTER IF IN PRINTED, ELECTRONIC, OR ANY OTHER FORM) AND ALL INFORMATION CONTAINED HEREIN REMAINS AT ALL TIMES IN NOCO. NO INTELLECTUAL PROPERTY RIGHTS ARE TRANSFERRED TO YOU BY ACCESS TO THIS DOCUMENT OR OTHERWISE.

V05.21.2021A 19




# GBX55

BOOST<sup>®</sup> X<sup>™</sup>  
ULTRASAFE<sup>®</sup> JUMP STARTER

## TECH SPECS

0180019

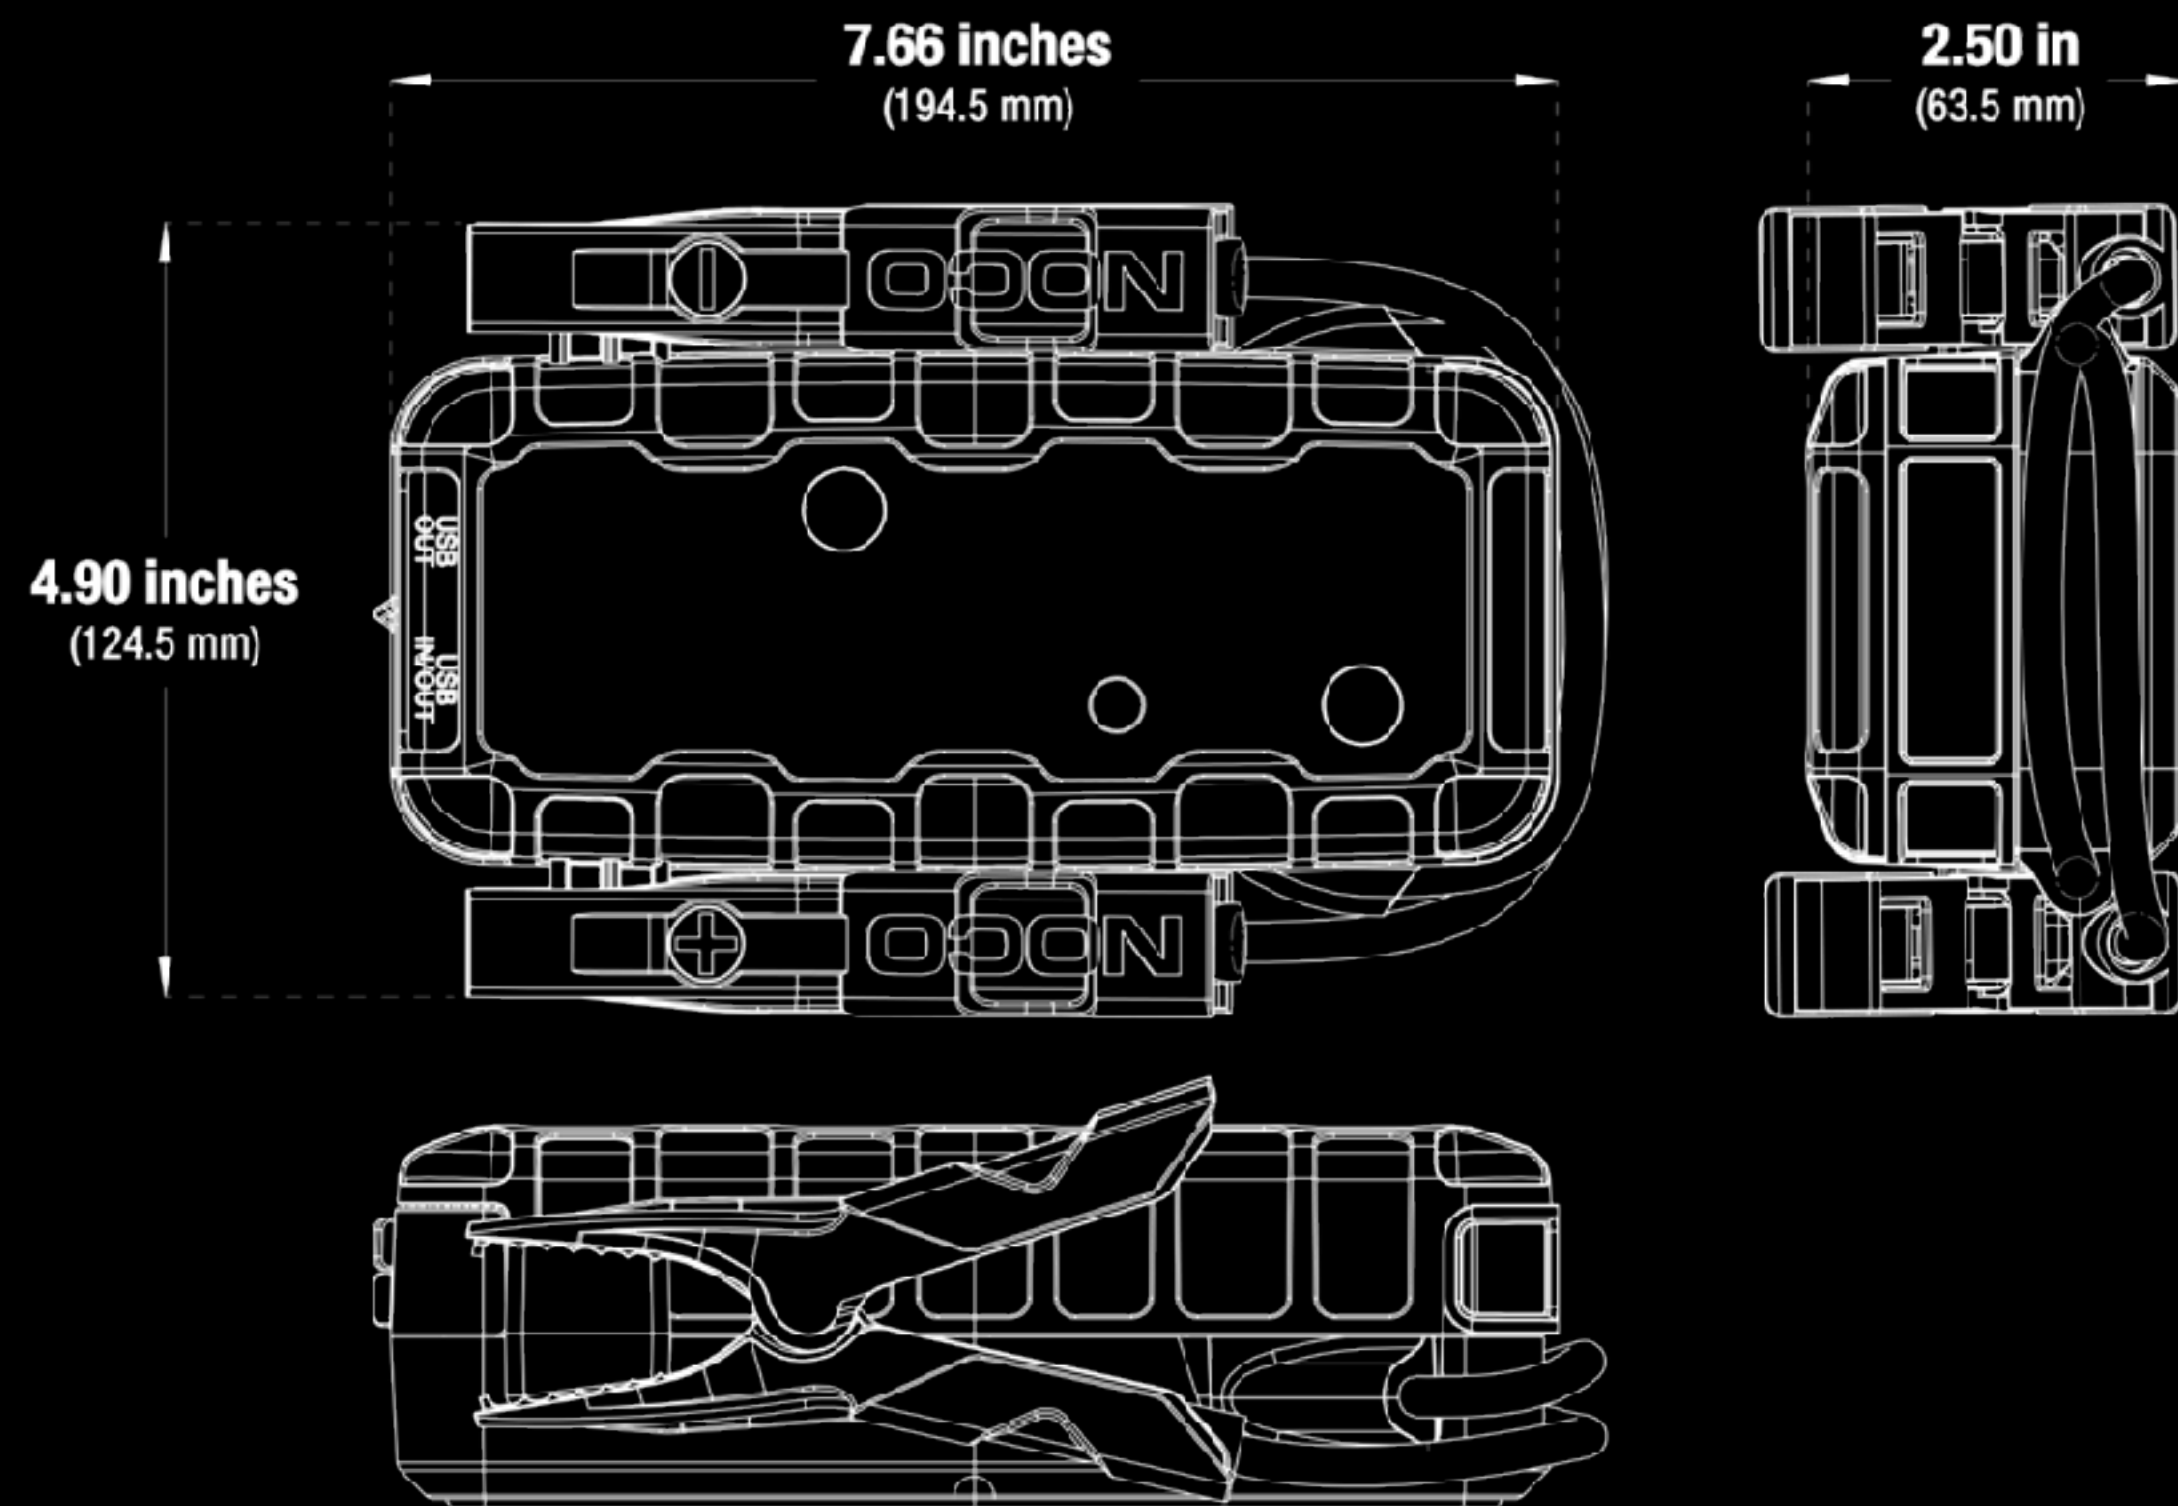

### JUMPSTARTERS

### ACCESSORIES

OVERVIEW

TECH SPECS

COMPARE

#### Operating Requirements

**Operating Temperature:** -4° to 122° F (-20° to +50° C)  
**Charging Temperature:** 32° to 104° F (0° to +40° C)  
**Storage Temperature:** -4° to 122° F (-20° to +50° C)  
**Relative Humidity:** 0 to 95% Non-Condensing  
**Cooling:** Natural Convection

#### Jump Starting

**Petrol Engine Size:** 7.5L  
**Diesel Engine Size:** 5L  
**Peak Current:** 1750 Amps  
**Battery Types:** 12V Lead-Acid Only  
(Wet, Gel, MF, EFB, AGM)

#### Flashlight

**Lumens (LED's):** 200L  
**Number of Modes:** 7X  
(100%, 50%, 10%, SOS, Blink, Strobe, Off)

#### Safety

**Over-Current:** Yes  
**Open-Circuit:** Yes  
**Over-heating:** Yes  
**Over-charge:** Yes  
**Spark-Proof:** Yes  
**Reverse Polarity:** Yes

#### Protection

**IP Rating:** IP65 (w/ Ports Closed)

#### Size and Weight

**Length:** 7.7 Inches (195 mm)  
**Width:** 4.9 Inches (124.46 mm)  
**Height:** 2.5 Inches (63.50 mm)  
**Weight:** 2.58 Pounds (1.17 kg)

#### Charging

**USB-C (In):** 5V 1.5A/9V 3A/12V 3A/15V 3A/20V 3A  
**USB-C (Out):** 5V 3A/9V 3A/12V 3A/15V 3A/20V 3A  
**USB (Output):** 5VDC 2.1A Max / 10W Max  
**Recharge Time:** 1.2 @ 60W

#### Internal Battery

**Capacity:** 3150mAh  
**Watt Hours:** 46.62 Wh  
**Chemistry:** Lithium Nickel Manganese Cobalt  
**Charge Cycles:** Over 1000X  
**Charge Length:** Holds 70% Charge Over A Year

#### Clamps

**Type:** HD Precision Clamps  
**Span:** 2.1 Inches (53.6 mm)  
**Wire Size:** 8 AWG

#### Limited Warranty

1-Year Limited Warranty



# GBX75 BOOST<sup>®</sup>X<sup>™</sup>

## ULTRASAFE<sup>®</sup> JUMP STARTER

0180020



12V 2500A

8.5L PETROL  
6.5L DIESEL

FAST CHARGE  
USB-C IN/OUT

LED FLASHLIGHT  
400-LUMEN 8 LEDs  
SEVEN LIGHT MODES

JUMPSTARTERS

ACCESSORIES

OVERVIEW

TECH SPECS

COMPARE



#### What's In The Box

- GBX75 Lithium Jump Starter w/ integrated HD Precision Clamps
- 24in USB-A to USB-C Cable
- 24in (0.6m) 12V to USB-C Cable
- Microfiber Storage Bag
- User Guide & Warranty Information

#### Retail Packaging

Dimensions: 7.28" x 4.84" x 9.80"  
Weight: 5.09 lbs  
UPC: 0-46221-15005-6

#### Inner Carton:

Dimensions: 10.27" x 7.72" x 5.39"  
Weight: 5.44 lbs

#### Master Carton:

Dimensions: 15.98" x 10.83" x 11.50"  
Weight: 22.60 lbs  
Quantity: 4  
UCC: 10046221150053

#### Units Per Pallet:

120 Units

**NOCO**<sup>®</sup>

PROPRIETARY AND CONFIDENTIAL. COPYRIGHT © 2021 THE NOCO COMPANY

THIS DOCUMENT CONTAINS PROPRIETARY, CONFIDENTIAL, COPYRIGHTED, AND TRADE SECRET INFORMATION OF THE NOCO COMPANY AND ITS AFFILIATED COMPANIES ("NOCO"). ALL MATERIAL, INFORMATION, AND CONTENT ARE THE PROPERTY OF NOCO, AND NOCO RETAINS ALL RIGHT, TITLE, AND INTEREST THEREIN. THIS DOCUMENT MAY NOT BE COPIED, DISSEMINATED, DISCLOSED, PUBLISHED, DIVULGED, OR REPRODUCED, IN WHOLE OR IN PART, WITHOUT THE PRIOR WRITTEN CONSENT OF NOCO. TITLE IN AND TO THIS DOCUMENT (NO MATTER IF IN PRINTED, ELECTRONIC, OR ANY OTHER FORM) AND ALL INFORMATION CONTAINED HEREIN REMAINS AT ALL TIMES IN NOCO. NO INTELLECTUAL PROPERTY RIGHTS ARE TRANSFERRED TO YOU BY ACCESS TO THIS DOCUMENT OR OTHERWISE.


V05.21.2021A 21



# GBX75 BOOST<sup>®</sup> X<sup>™</sup> ULTRASAFE<sup>®</sup> JUMP STARTER

## TECH SPECS

0180020

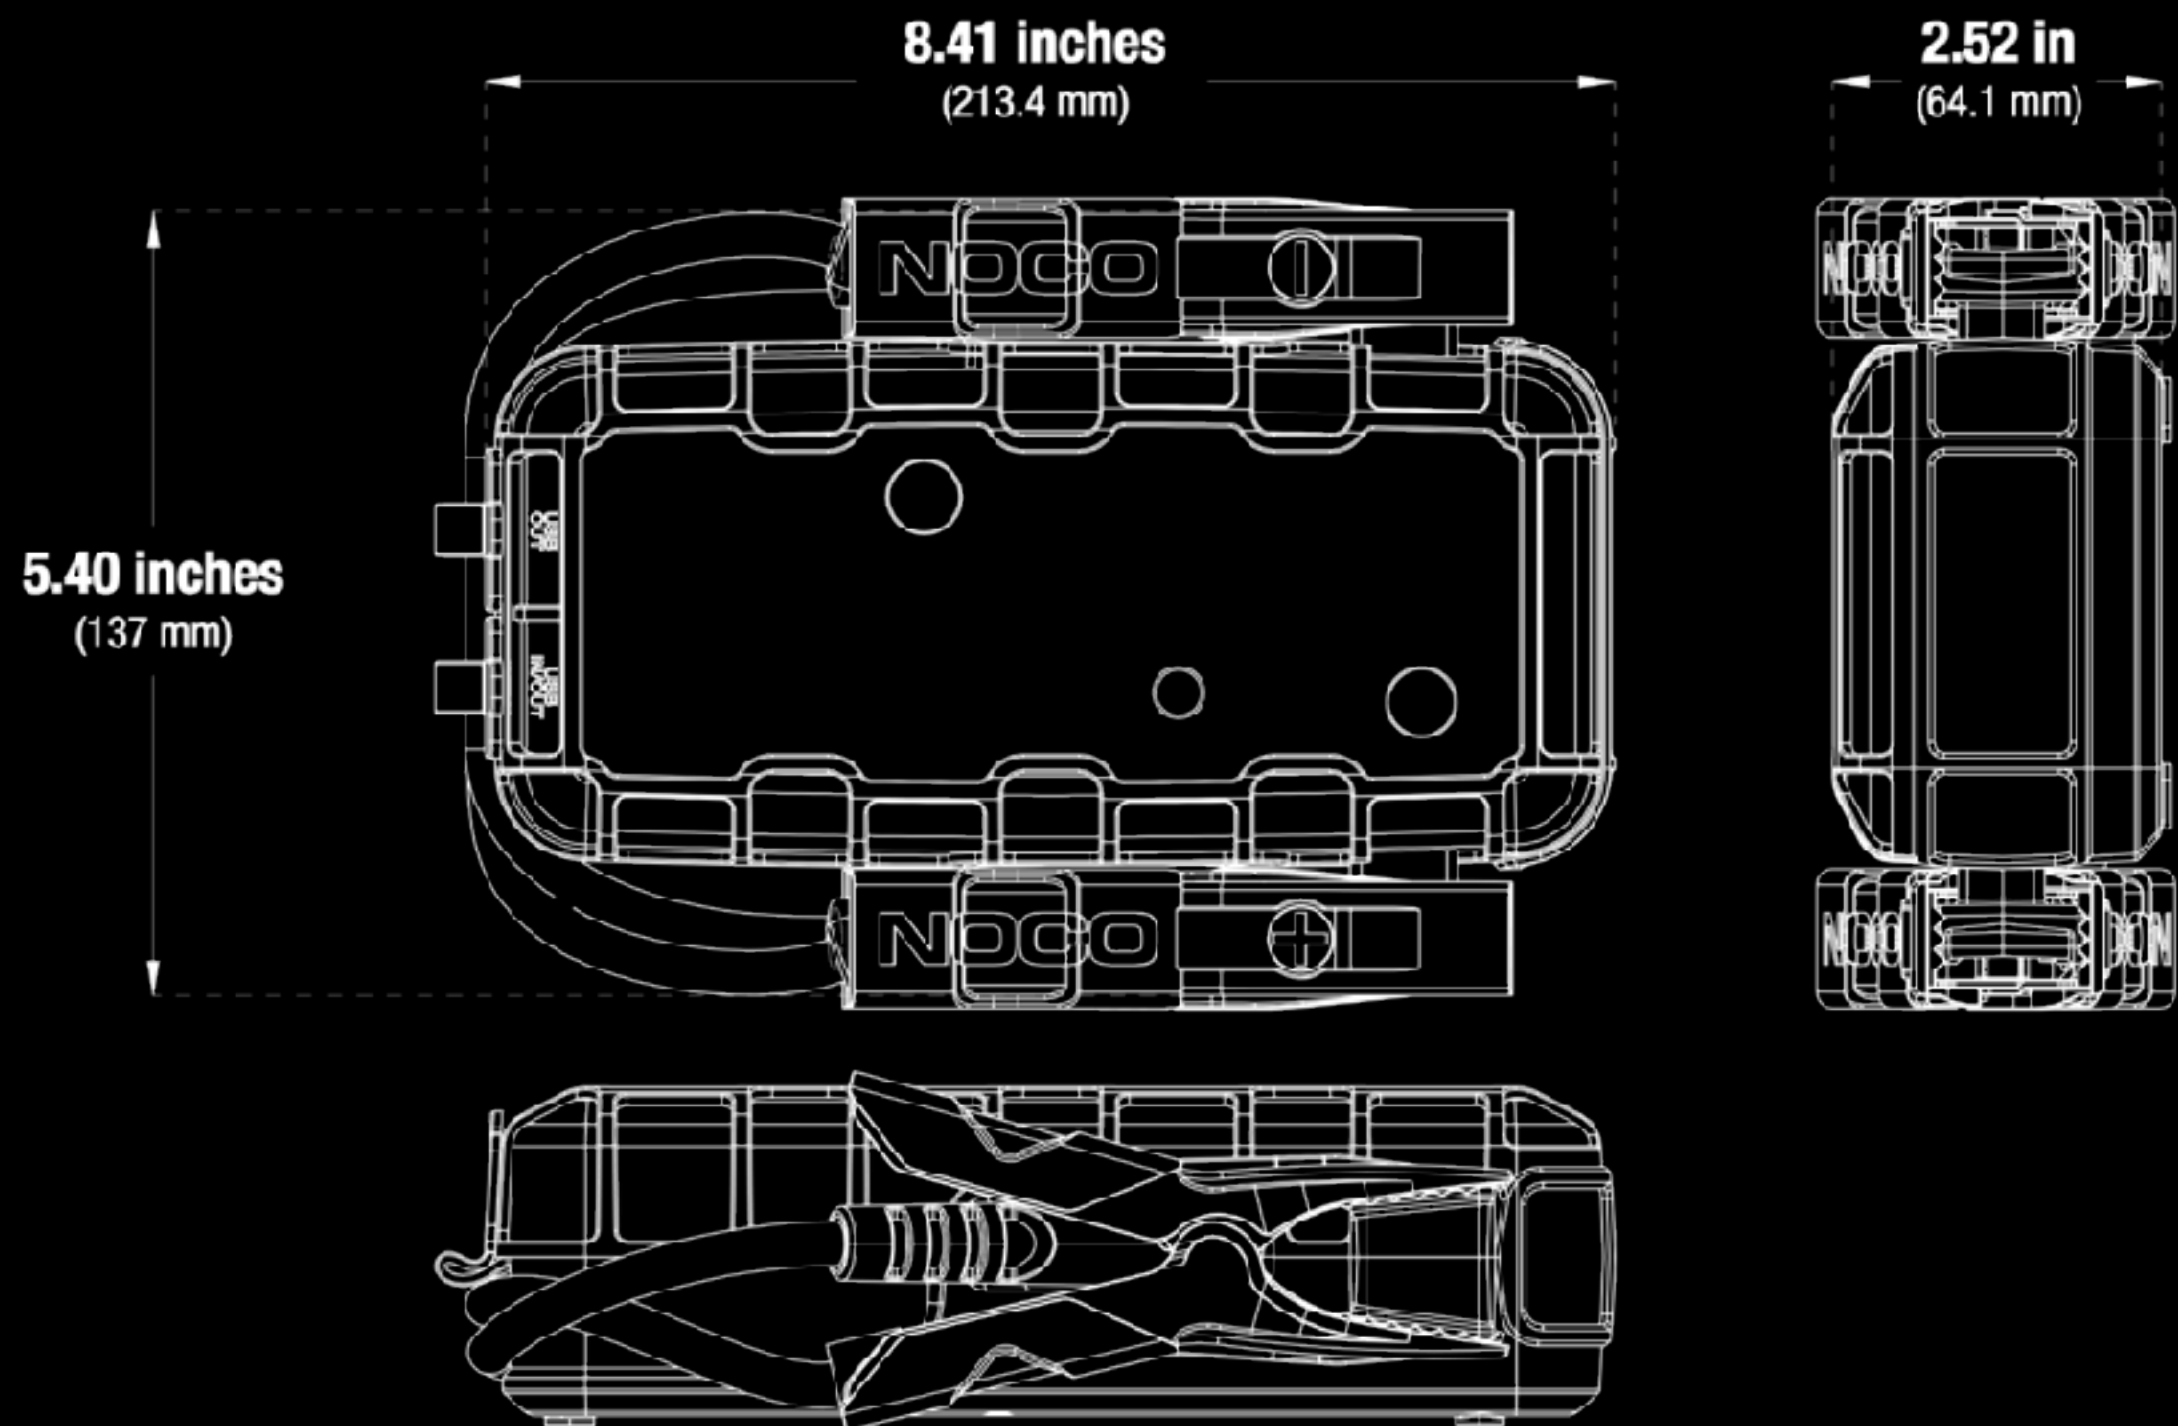

### Operating Requirements

**Operating Temperature:** -4° to 122° F (-20° to +50° C)  
**Charging Temperature:** 32° to 104° F (0° to +40° C)  
**Storage Temperature:** -4° to 122° F (-20° to +50° C)  
**Relative Humidity:** 0 to 95% Non-Condensing  
**Cooling:** Natural Convection

### Jump Starting

**Petrol Engine Size:** 8.5L  
**Diesel Engine Size:** 6.5L  
**Peak Current:** 2,500 Amps  
**Battery Types:** 12V Lead-Acid Only  
(Wet, Gel, MF, EFB, AGM)

### Flashlight

**Lumens (LED's):** 400L  
**Number of Modes:** 7X  
(100%, 50%, 10%, SOS, Blink, Strobe, Off)

### Safety

**Over-Current:** Yes  
**Open-Circuit:** Yes  
**Over-heating:** Yes  
**Over-charge:** Yes  
**Spark-Proof:** Yes  
**Reverse Polarity:** Yes

### Protection

**IP Rating:** IP65 (w/ Ports Closed)

### Size and Weight

**Length:** 8.4 Inches (213 mm)  
**Width:** 5.4 Inches (137 mm)  
**Height:** 2.5 Inches (64 mm)  
**Weight:** 3.77 Pounds (1.71 kg)

### Charging

**USB-C (In):** 5V 1.5A/9V 3A/12V 3A/15V 3A/20V 3A  
**USB-C (Out):** 5V 3A/9V 3A/12V 3A/15V 3A/20V 3A  
**USB-A (Out):** 5VDC 2.1A Max / 10W Max  
**Recharge Time:** 1.7hr @ 60W

### Internal Battery

**Capacity:** 5000mAh  
**Watt Hours:** 74Wh  
**Chemistry:** Lithium Nickel Manganese Cobalt  
**Charge Cycles:** Over 1000X  
**Charge Length:** Holds 70% Charge Over A Year

### Clamps

**Type:** HD Precision Clamps  
**Span:** 2.05 Inches (52.24 mm)  
**Wire Size:** 6AWG

### Limited Warranty

1-Year Limited Warranty

JUMPSTARTERS

ACCESSORIES

OVERVIEW

TECH SPECS

COMPARE



# GBX155 BOOST<sup>®</sup>X<sup>™</sup>

## ULTRASAFE<sup>®</sup> JUMP STARTER

0180021

12V 4250A

10.0L PETROL  
8.0L DIESEL

FAST CHARGE  
USB-C IN/OUT

LED FLASHLIGHT  
500-LUMEN 16 LEDs  
SEVEN LIGHT MODES

JUMPSTARTERS

ACCESSORIES

OVERVIEW

TECH SPECS

COMPARE



#### What's In The Box

- GBX155 Lithium Jump Starter w/ integrated HD Precision Clamps
- 24in USB-A to USB-C Cable
- 24in (0.6m) 12V to USB-C Cable
- Microfiber Storage Bag
- User Guide & Warranty Information

#### Retail Packaging

Dimensions: 8.19" x 4.88" x 13.70"  
Weight: 8.00 lbs  
UPC: 0-46221-15006-3

#### Inner Carton:

Dimensions: 14.09" x 8.78" x 5.79"  
Weight: 8.46 lbs

#### Master Carton:

Dimensions: 14.76" x 9.25" x 12.50"  
Weight: 17.97 lbs  
Quantity: 2  
UCC: 10046221150060

#### Units Per Pallet:

72 Units



PROPRIETARY AND CONFIDENTIAL. COPYRIGHT © 2021 THE NOCO COMPANY

THIS DOCUMENT CONTAINS PROPRIETARY, CONFIDENTIAL, COPYRIGHTED, AND TRADE SECRET INFORMATION OF THE NOCO COMPANY AND ITS AFFILIATED COMPANIES ("NOCO"). ALL MATERIAL, INFORMATION, AND CONTENT ARE THE PROPERTY OF NOCO, AND NOCO RETAINS ALL RIGHT, TITLE, AND INTEREST THEREIN. THIS DOCUMENT MAY NOT BE COPIED, DISSEMINATED, DISCLOSED, PUBLISHED, DIVULGED, OR REPRODUCED, IN WHOLE OR IN PART, WITHOUT THE PRIOR WRITTEN CONSENT OF NOCO. TITLE IN AND TO THIS DOCUMENT (NO MATTER IF IN PRINTED, ELECTRONIC, OR ANY OTHER FORM) AND ALL INFORMATION CONTAINED HEREIN REMAINS AT ALL TIMES IN NOCO. NO INTELLECTUAL PROPERTY RIGHTS ARE TRANSFERRED TO YOU BY ACCESS TO THIS DOCUMENT OR OTHERWISE.

V05.21.2021A 23



# GBX155

## BOOST<sup>®</sup>X<sup>™</sup>

### ULTRASAFE<sup>®</sup> JUMP STARTER

# TECH SPECS

0180021


JUMPSTARTERS

ACCESSORIES

OVERVIEW

TECH SPECS

COMPARE

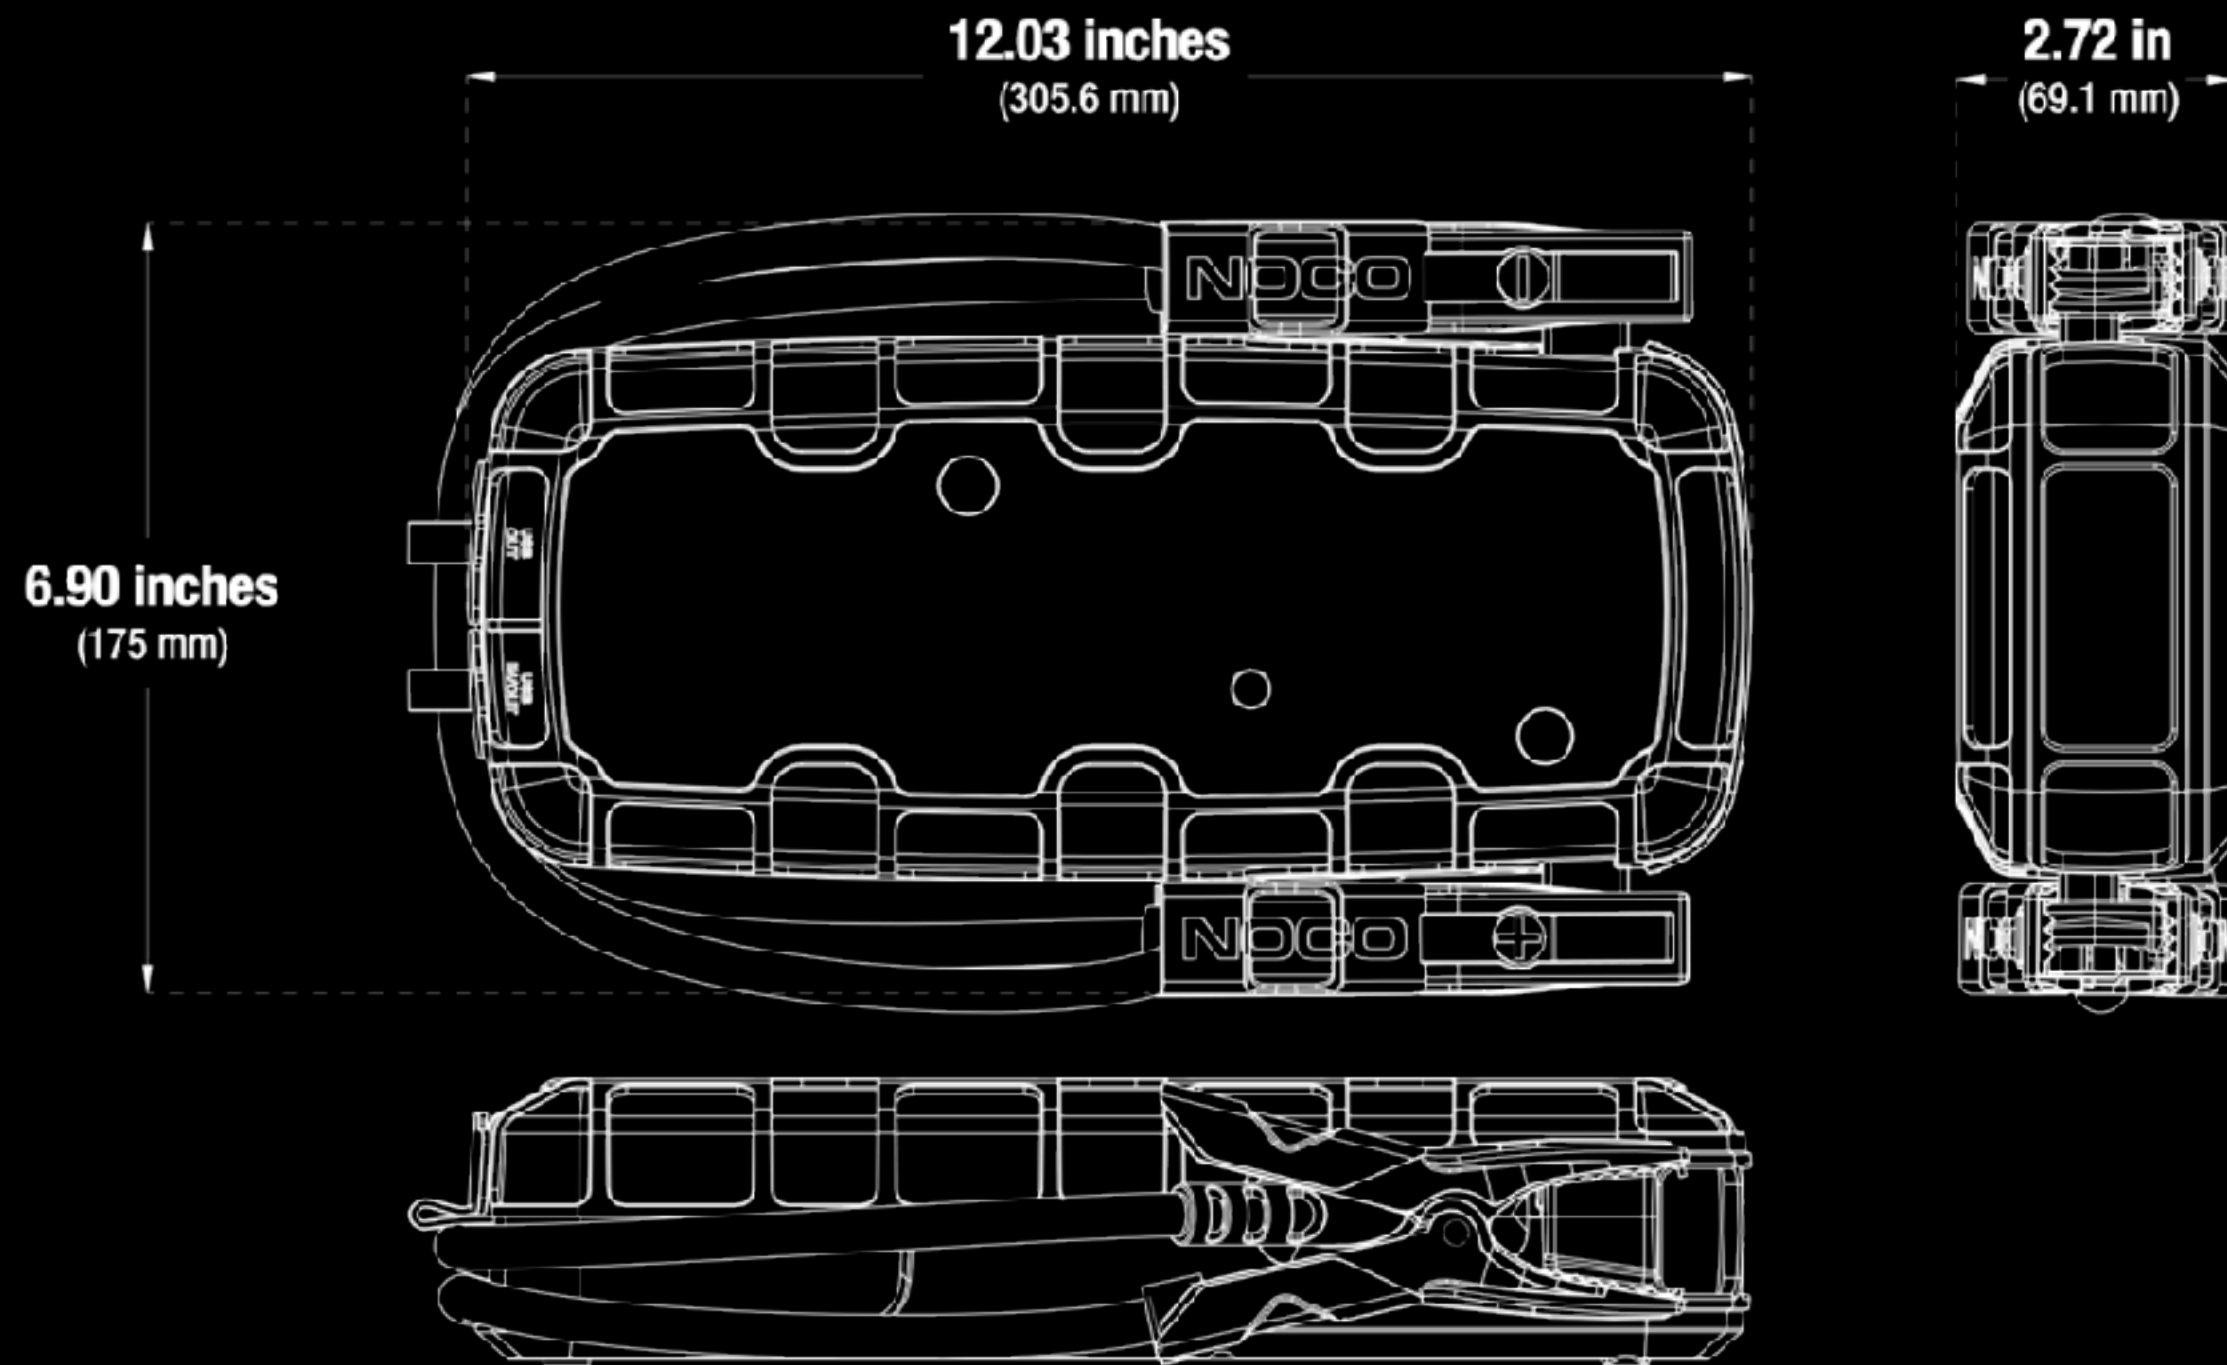

### Operating Requirements

**Operating Temperature:** -4° to 122° F (-20° to +50° C)  
**Charging Temperature:** 32° to 104° F (0° to +40° C)  
**Storage Temperature:** -4° to 122° F (-20° to +50° C)  
**Relative Humidity:** 0 to 95% Non-Condensing  
**Cooling:** Natural Convection

### Jump Starting

**Petrol Engine Size:** 10.0L  
**Diesel Engine Size:** 8.0L  
**Peak Current:** 4,250 Amps  
**Battery Types:** 12V Lead-Acid Only  
(Wet, Gel, MF, EFB, AGM)

### Flashlight

**Lumens (LED's):** 500L  
**Number of Modes:** 7X  
(100%, 50%, 10%, SOS, Blink, Strobe, Off)

### Safety

**Over-Current:** Yes  
**Open-Circuit:** Yes  
**Over-heating:** Yes  
**Over-charge:** Yes  
**Spark-Proof:** Yes  
**Reverse Polarity:** Yes

### Protection

**IP Rating:** IP65 (w/ Ports Closed)

### Size and Weight

**Height:** 12.0 Inches (305 mm)  
**Width:** 6.9 Inches (175 mm)  
**Depth:** 2.7 Inches (69 mm)  
**Weight:** 5.82 Pounds (2.64 kg)

### Charging

**USB-C (In):** 5V 1.5A/9V 3A/12V 3A/15V 3A/20V 3A  
**USB-C (Out):** 5V 3A/9V 3A/12V 3A/15V 3A/20V 3A  
**USB-A (Out):** 5VDC 2.1A Max / 10W Max  
**Recharge Time:** 2.7 hrs @ 60W

### Internal Battery

**Capacity:** 6750mAh  
**Watt Hours:** 99Wh  
**Chemistry:** Lithium Nickel Manganese Cobalt  
**Charge Cycles:** Over 1000X  
**Charge Length:** Holds 70% Charge Over A Year

### Clamps

**Type:** HD Precision Clamps  
**Span:** 1.97 Inches (50 mm)  
**Wire Size:** 4AWG

### Limited Warranty

1-Year Limited Warranty

**NOCO<sup>®</sup>**

PROPRIETARY AND CONFIDENTIAL. COPYRIGHT © 2021 THE NOCO COMPANY

THIS DOCUMENT CONTAINS PROPRIETARY, CONFIDENTIAL, COPYRIGHTED, AND TRADE SECRET INFORMATION OF THE NOCO COMPANY AND ITS AFFILIATED COMPANIES ("NOCO"). ALL MATERIAL, INFORMATION, AND CONTENT ARE THE PROPERTY OF NOCO, AND NOCO RETAINS ALL RIGHT, TITLE, AND INTEREST THEREIN. THIS DOCUMENT MAY NOT BE COPIED, DISSEMINATED, DISCLOSED, PUBLISHED, DIVULGED, OR REPRODUCED, IN WHOLE OR IN PART, WITHOUT THE PRIOR WRITTEN CONSENT OF NOCO. TITLE IN AND TO THIS DOCUMENT (NO MATTER IF IN PRINTED, ELECTRONIC, OR ANY OTHER FORM) AND ALL INFORMATION CONTAINED HEREIN REMAINS AT ALL TIMES IN NOCO. NO INTELLECTUAL PROPERTY RIGHTS ARE TRANSFERRED TO YOU BY ACCESS TO THIS DOCUMENT OR OTHERWISE.

V05.21.2021A 24



# BOOST<sup>®</sup>X<sup>™</sup> PRODUCT LINE OVERVIEW




|                   | GBX45<br>BOOST <sup>®</sup> X <sup>™</sup> | GBX55<br>BOOST <sup>®</sup> X <sup>™</sup> | GBX75<br>BOOST <sup>®</sup> X <sup>™</sup> | GBX155<br>BOOST <sup>®</sup> X <sup>™</sup> |
|-------------------|--|--|--|---|
| CURRENT RATING    | 1250A                                      | 1750A                                      | 2500A                                      | 4250A                                       |
| USB-C IN/OUT      | ✓  | ✓  | ✓  | ✓   |
| RECOMMENDED UP TO | 6.5L GAS 4.0L DIESEL                       | 7.0L GAS 4.5L DIESEL                       | 8.5L GAS 6.5L DIESEL                       | 10.0L GAS 8.0L DIESEL                       |
| FLASHLIGHT LUMENS | 100 💡                                      | 200 💡                                      | 400 💡                                      | 500 💡                                       |
| USB-A OUTPUT      | 1 PORT                                     |  |  | 2 PORTS                                     |
| WH RATING         | 31WH                                       | 46WH                                       | 74WH                                       | 99WH  |
|                   | 0180018                                    | 0180019                                    | 0180020                                    | 0180021                                     |





# GBC007 BOOST EYELET CABLE W/ X-CONNECT ADAPTER

0180014

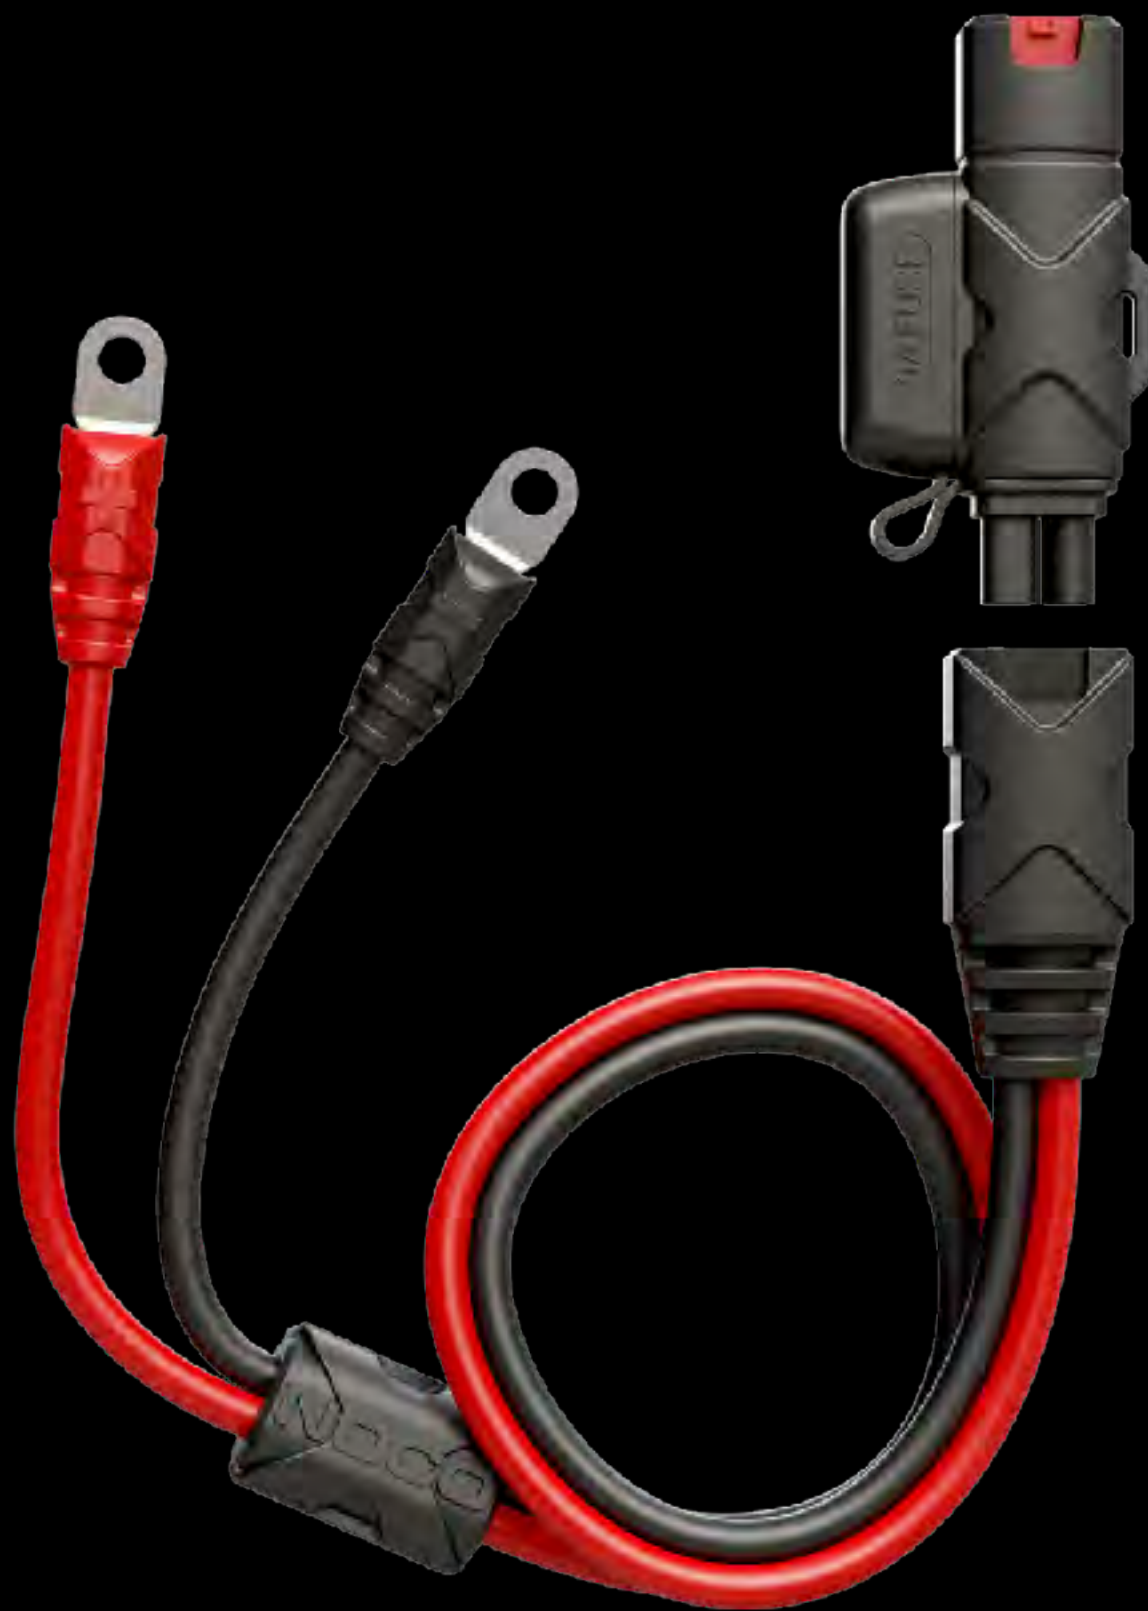


THE NOCO GBC007 EYELETS CAN BE HARD-MOUNTED FOR QUICK  
AND CONVENIENT CHARGING OR JUMP STARTING.

COMPATIBLE  
WITH GBX45

EYELETS

SAE CONNECTOR

BOOST FEMALE  
CONNECTOR

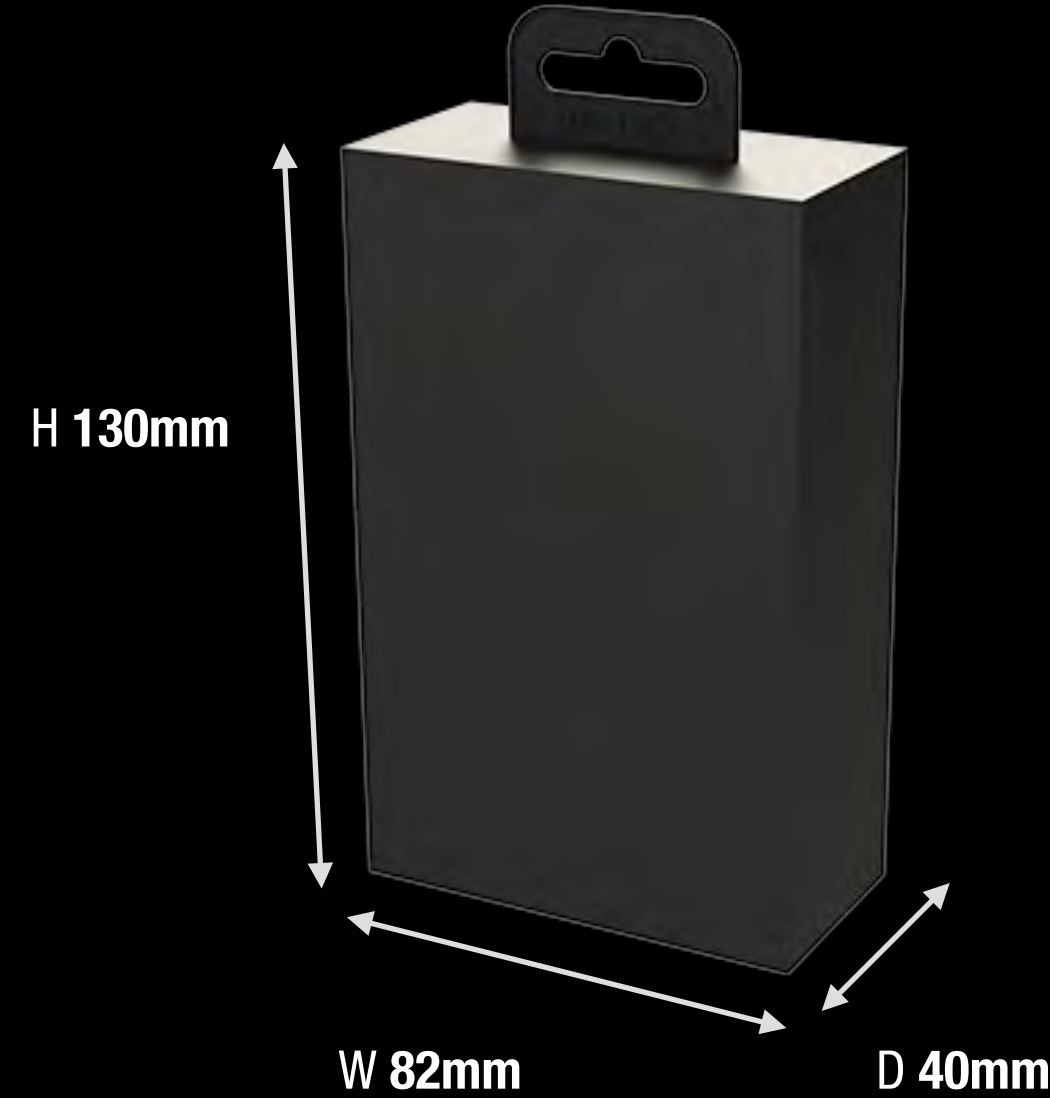

**What's In The Box**

- GBC007 Boost Eyelet Cable with X-Connect Adapter

**Inner Carton:**

Dimensions: 9.4 x 4.8 x 13.8 (cm)  
Weight: 0.26 kg

**Master Carton:**

Dimensions: 19.5 x 14.5 x 15.6 (cm)  
Weight: 1.60 kg  
Quantity: 6  
UCC: 20046221160172

**Retail Packaging**

Dimensions: 8.2 x 4 x 13 (cm)  
Weight: 0.19 kg  
UPC: 0-46221-16017-8

**Units Per Pallet:**

N/A Units

PROPRIETARY AND CONFIDENTIAL. COPYRIGHT © 2021 THE NOCO COMPANY

THIS DOCUMENT CONTAINS PROPRIETARY, CONFIDENTIAL, COPYRIGHTED, AND TRADE SECRET INFORMATION OF THE NOCO COMPANY AND ITS AFFILIATED COMPANIES ("NOCO"). ALL MATERIAL, INFORMATION, AND CONTENT ARE THE PROPERTY OF NOCO, AND NOCO RETAINS ALL RIGHT, TITLE, AND INTEREST THEREIN. THIS DOCUMENT MAY NOT BE COPIED, DISSEMINATED, DISCLOSED, PUBLISHED, DIVULGED, OR REPRODUCED, IN WHOLE OR IN PART, WITHOUT THE PRIOR WRITTEN CONSENT OF NOCO. TITLE IN AND TO THIS DOCUMENT (NO MATTER IF IN PRINTED, ELECTRONIC, OR ANY OTHER FORM) AND ALL INFORMATION CONTAINED HEREIN REMAINS AT ALL TIMES IN NOCO. NO INTELLECTUAL PROPERTY RIGHTS ARE TRANSFERRED TO YOU BY ACCESS TO THIS DOCUMENT OR OTHERWISE.



